



Washing machine
WM51

Tel.: +49 40 600 094 680 E-Mail.: info@wesco-navy.de

Washing machine WM51

Heating (230 Volt/440 Volt).....3,0 KW / 4,2 KW

Motor.....0,3 KW

Total capacity (230 Volt/440 Volt)...3,3 KW/4,5 KW

=====

Heating	: 3,0 KW / 4,2 kW
---------	-------------------

Drum volume	: 60 Liters
-------------	-------------

Extraction	: 1400 r.p.m.
------------	---------------

G-factor	: 530
----------	-------


Drain system	: Drain pump
---------------------	---------------------

Marine:


- Front, top stainless steel. Sides titanium.
- Drum is made of stainless steel.
- Fully automatic operation.
- One-Button-Programme-Selection.
- More than 15 programs.
- Drain pump is factory installed.
- Can be built in.
- As Wash-Tower with drying tumbler T506-x.
- Complete and ready for use.
- Cable with plug.

Power supply 230-60-1, L=2100mm


REAR

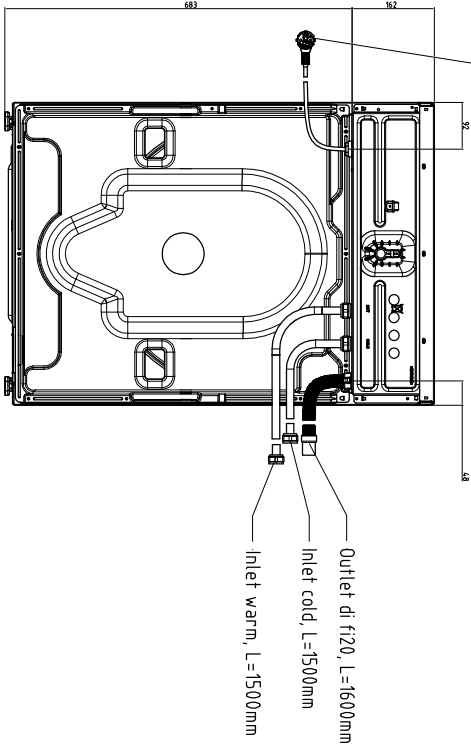



RIGHT

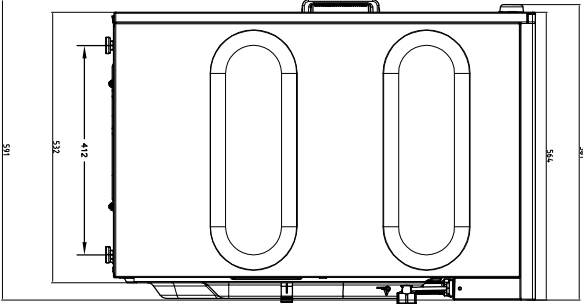

FRONT

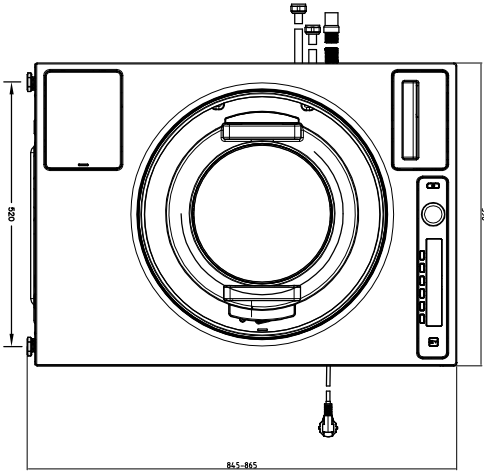

TOP

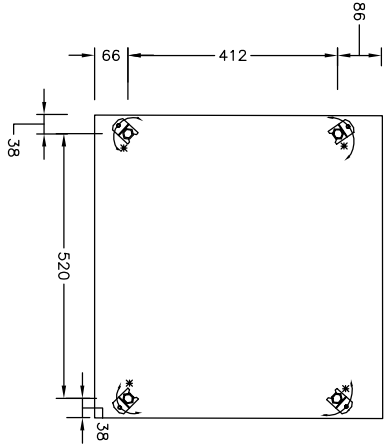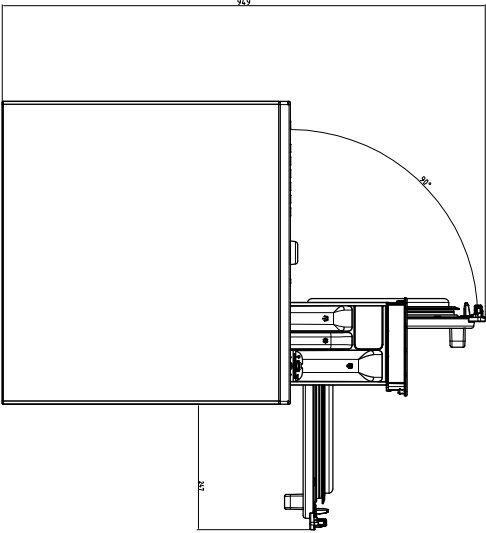


FRONT

PLOT OUT OF SCALE

* Mounting to ground facilities are yard's supply.

Foot design

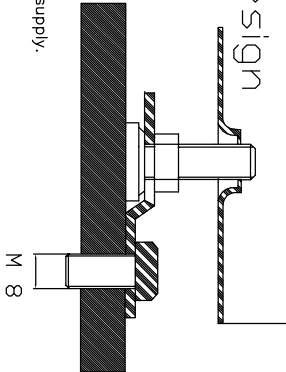

Wir behalten uns vor, die technischen Spezifikationen im Interesse der Weiterentwicklung zu verändern.
We reserve the right to modify the specifications if necessary.

ITEM:

Washing machine

WM51

Waschmaschine

THIS DRAWING REMAINS

THE PROPERTY OF

WESCO Navy

DRAW.

KO 08.12.20

REV.

—

—

Tel.: +49 40 600 094 680 Fax.: +49 40 536 75 01


E-mail.: Info@wesco-navy.de

WESCO Navy

Hamburg

— WIRES IN ALL MACHINES
 - - - WIRES IN SOME MACHINES
 - - - INTERNAL CONNECTION
 * CONNECTED IN SOME MACHINES


F: RADIO INTERFERENCE FILTER
 EL: HEATING ELEMENT
 AP: DRAIN PUMP 50/60 Hz
 AV: DRAIN VALVE
 NTC: THERMISTOR
 IV 1: INLET VALVE 1
 IV 2: INLET VALVE 2
 IV 3: INLET VALVE 3 (HOT)
 MO: MOTOR
 NS: PRESSURE SENSOR
 INKB: INCOMING GROUND
 UI: USER INTERFACE BOARD
 LL 2: DOOR LOCK EMZ
 PMCU: PROGRAMMABLE MOTOR CONTROL UNIT
 BA: CONTAINER
 3D: WASH TUB MOVEMENT DETECTION SENSOR
 EADBS: EXTERNAL AUTODOSING BOOKING SYSTEM
 P: PRESSURE SWITCH

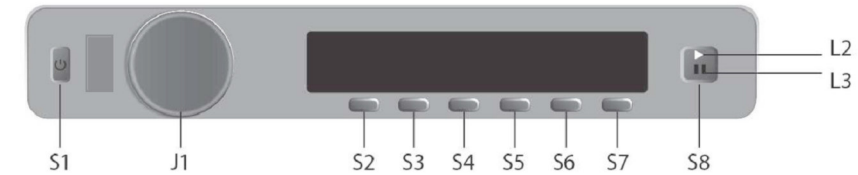



SERVICE MENU:
 TURN OFF POWER (\$1)
 WAIT FOR AT LEAST 5 SEC
 HOLD \$6 AND \$7 THEN TURN POWER ON (\$1)
 HOLD \$6 AND \$7 FOR ANOTHER 5 SEC WHEN POWER IS ON

HEATERS	CONNECTION
7000W (3500 + 3500)	3 PHASE 16A
4400W (2200 + 2200)	3 PHASE 10A
3000W (2000 + 1000)	3 PHASE 10A
3000W (2000 + 1000)	1 PHASE 16A
1500W	1 PHASE 10A


230V ~, 16A




230V ~, 10A

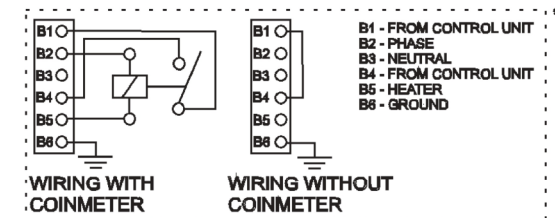


Wiring diagram 230 Volt 60 Hz 1 Ph

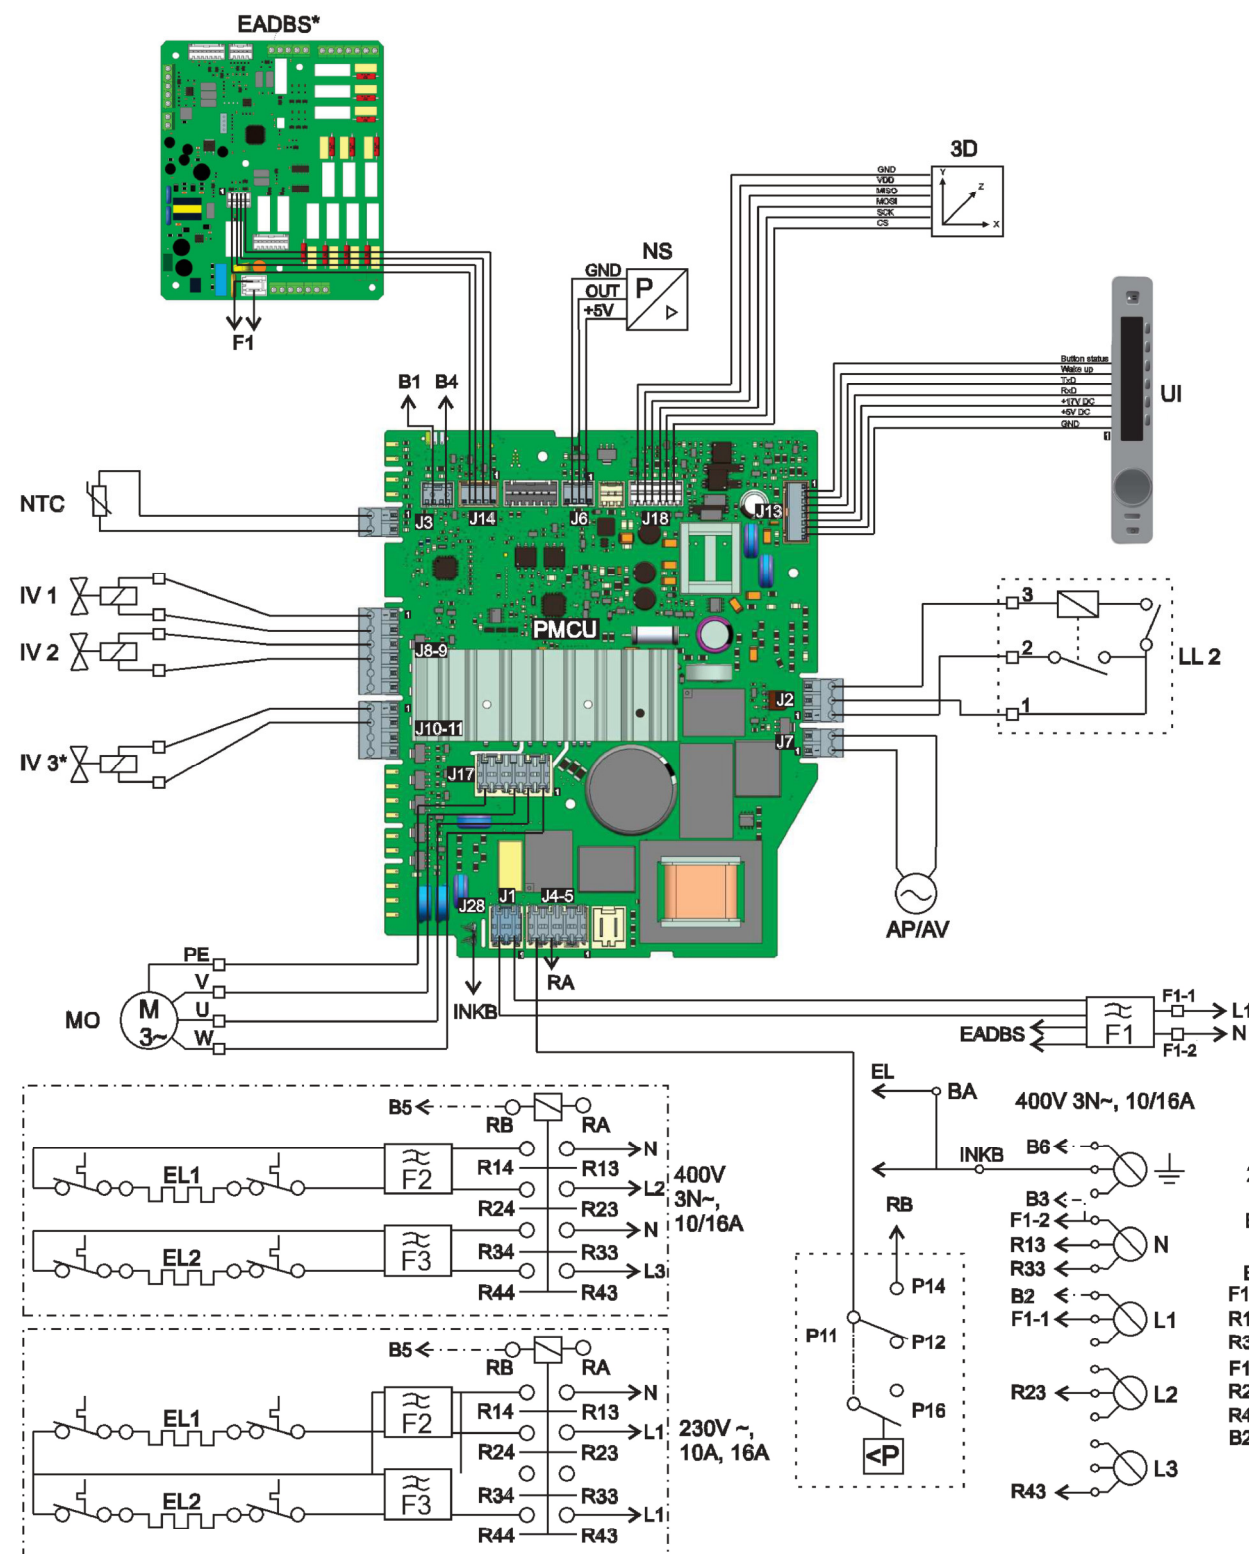


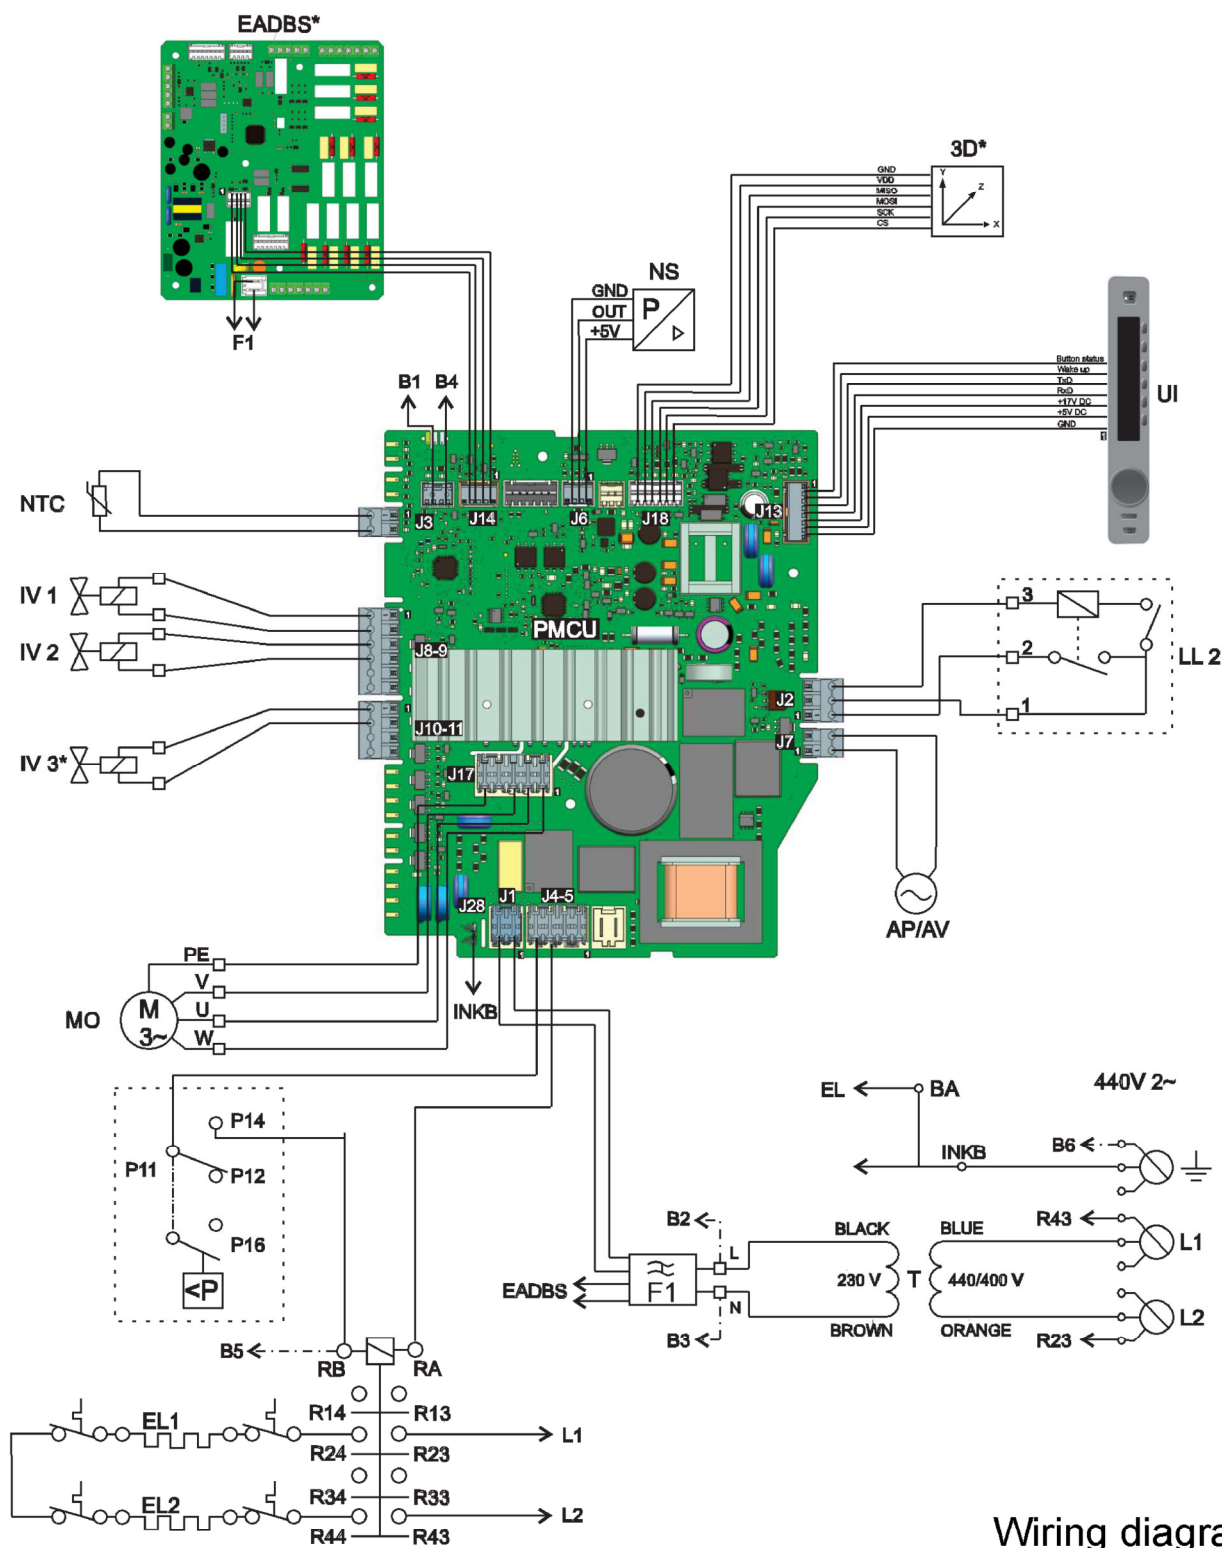

F: RADIO INTERFERENCE FILTER
 EL: HEATING ELEMENT
 AP: DRAIN PUMP 50/60 Hz
 AV: DRAIN VALVE
 NTC: THERMISTOR
 IV 1: INLET VALVE 1
 IV 2: INLET VALVE 2
 IV 3: INLET VALVE 3 (HOT)
 MO: MOTOR
 NS: PRESSURE SENSOR
 INKB: INCOMING GROUND
 UI: USER INTERFACE BOARD
 LL 2: DOOR LOCK EMZ
 PMCU: PROGRAMMABLE MOTOR CONTROL UNIT
 BA: CONTAINER
 T: TRANSFORMER
 3D: WASH TUB MOVEMENT DETECTION SENSOR
 EADBS: EXTERNAL AUTODOSING BOOKING SYSTEM
 P: PRESSURE SWITCH

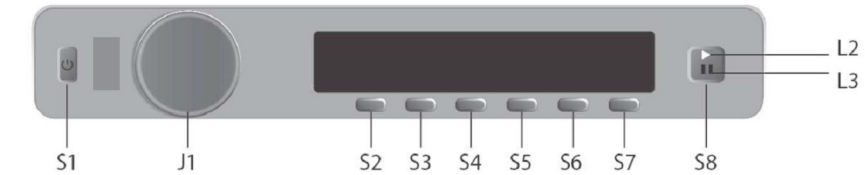

SERVICE MENU:
 TURN OFF POWER (S1)
 WAIT FOR AT LEAST 5 SEC
 HOLD S6 AND S7 THEN TURN POWER ON (S1)
 HOLD S6 AND S7 FOR ANOTHER 5 SEC WHEN POWER IS ON

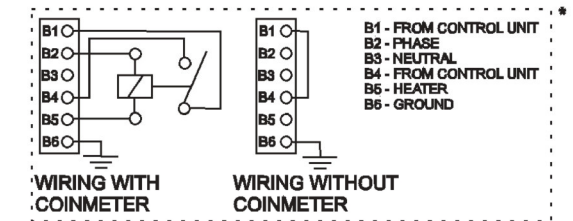

Wiring diagram for 400/440 Volt